

AddTags

Summary

This block is used to add tags to a target.


Implementation

- Drag and drop the block from the palette
- Link the "execute" action from the "executed" topic of the previous block

Example

This block adds 2 tags to the parent of the origin:

- One Marker tag
- One String tag whose value is defined by a SFormat

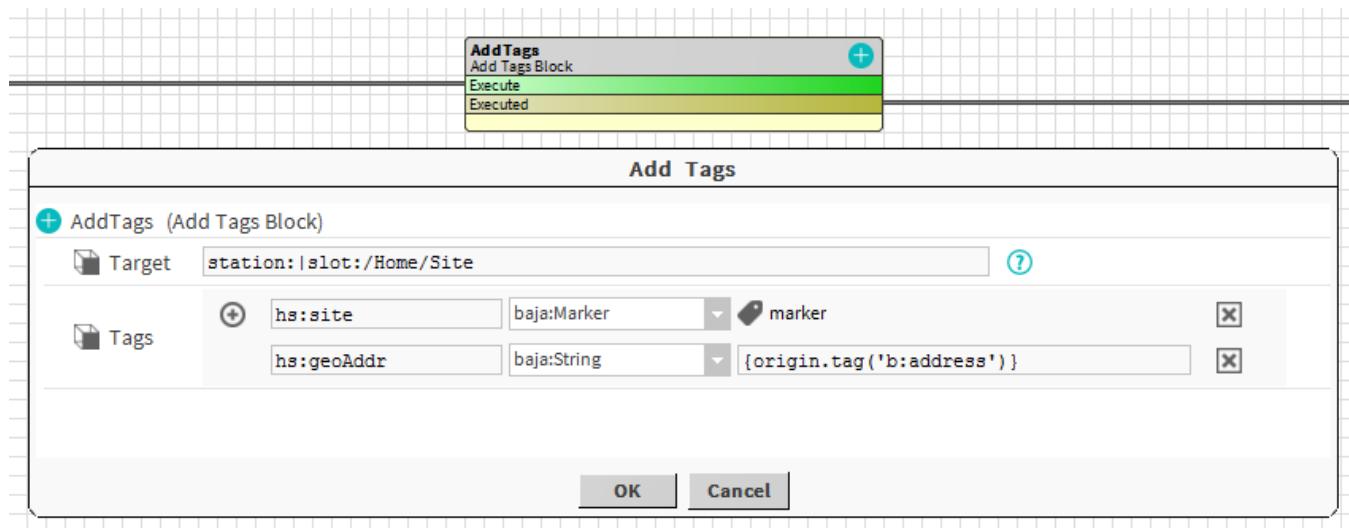

Properties

- Target: [SFormat](#) which to define the target (ord, queries, artifacts etc.).
- Tags: List of tags to add.
 - You can define existing tags from a dictionary
 - Tags doesn't have to be in a dictionary but we recommend you to do it
 - You can use SFormat to define the baja:string type to get dynamic values.

Behavior: DO & UNDO

An artifact will be created.